

Solution Number: 110831

Solution Summary: F4365 / 4-Series - Roll Tarp Install Tips & Tricks

Publication Date: May 27 2020

****Paper copies of solutions may not be the most current solutions****

Complaint or Symptom :

The Nutrient Applicator is “Tarp-Ready” from the factory, but not installed. Therefore, the install instructions will be provided from the roll tarp company, and need to be followed.


Problem or Situation :

The install instructions do not include routing power to the machine, or instruct on how to mount the solenoid.

Solution :


F4365 Nutrient Applicator:

When routing power to the battery box, there is a jumper harness that will need to be used to route Open/Close signal to the display. This is used in place of the Rocker Switch that is included with the tarp:

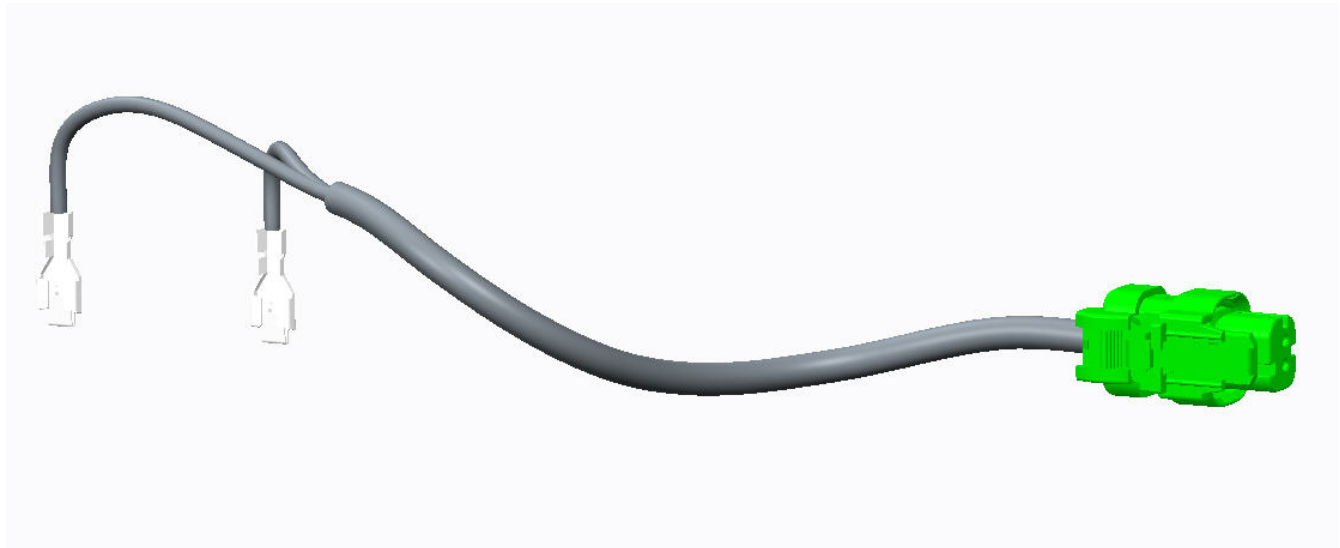


AKK20836 - WIRING HARNESS, JUMPER, ROLL TARP.

- This will connect at the 2-pin connector in the Battery Box:

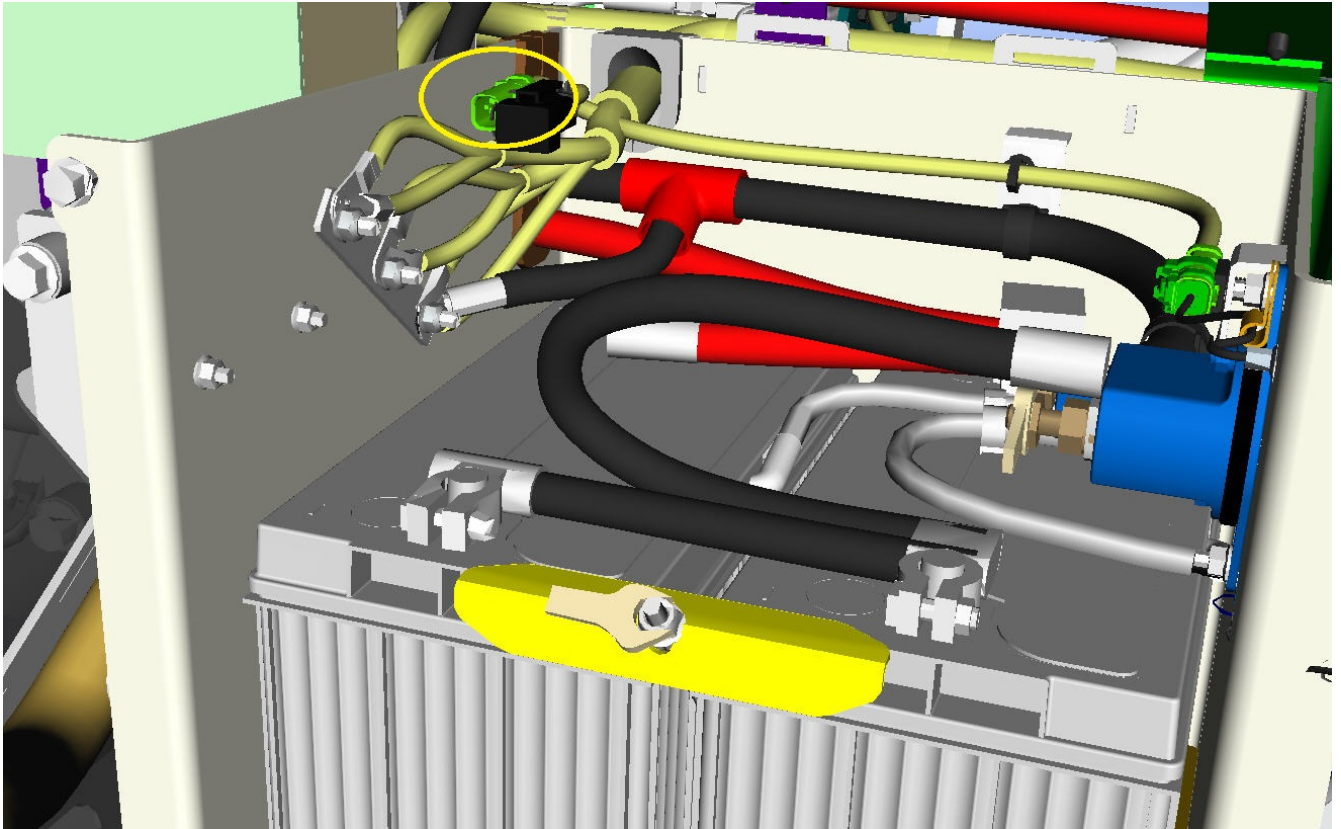

Front View.

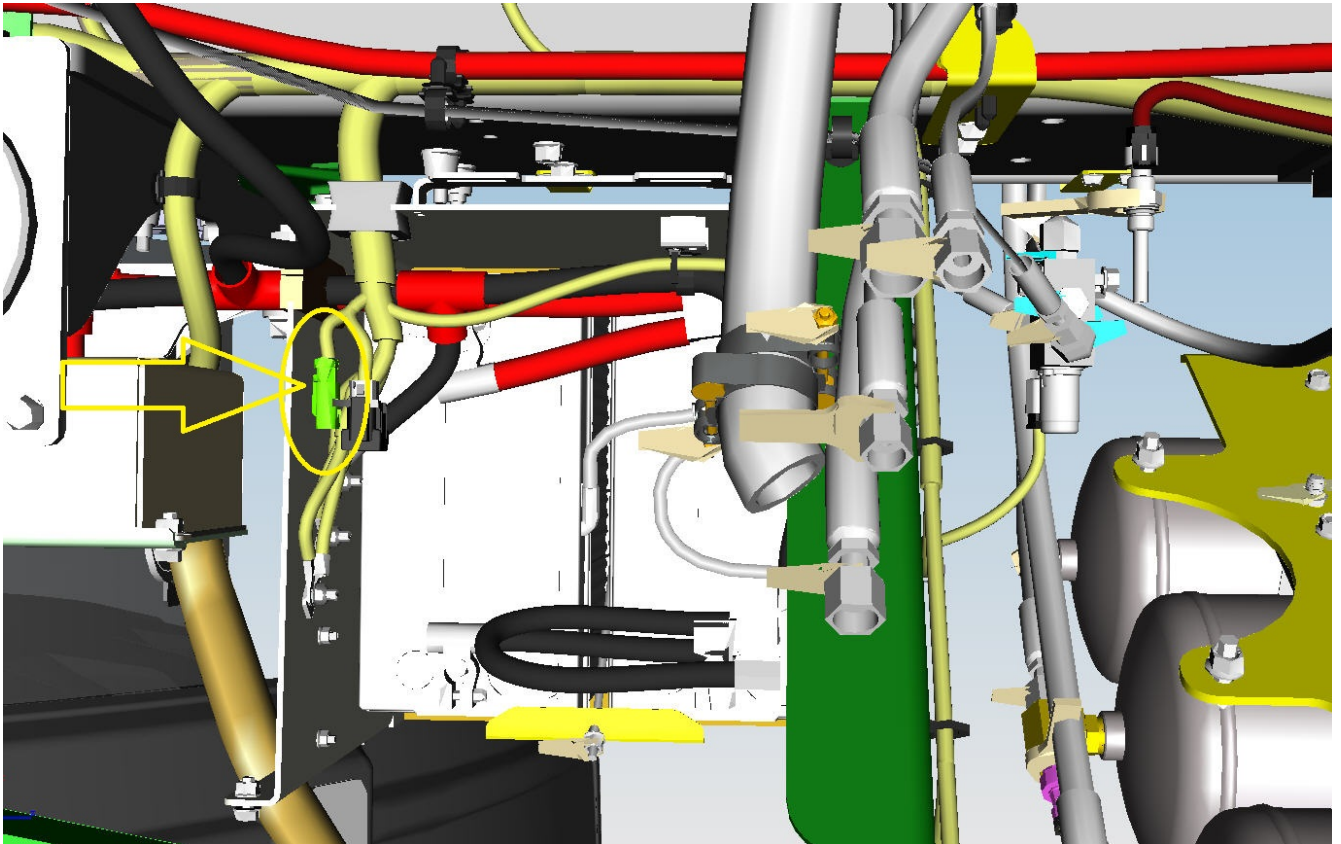


Top View.


There mounting bolts in the battery box will be used for the Relay/Solenoid provided with the tarp. See images as reference for mounting location:



Relay/Solenoid.

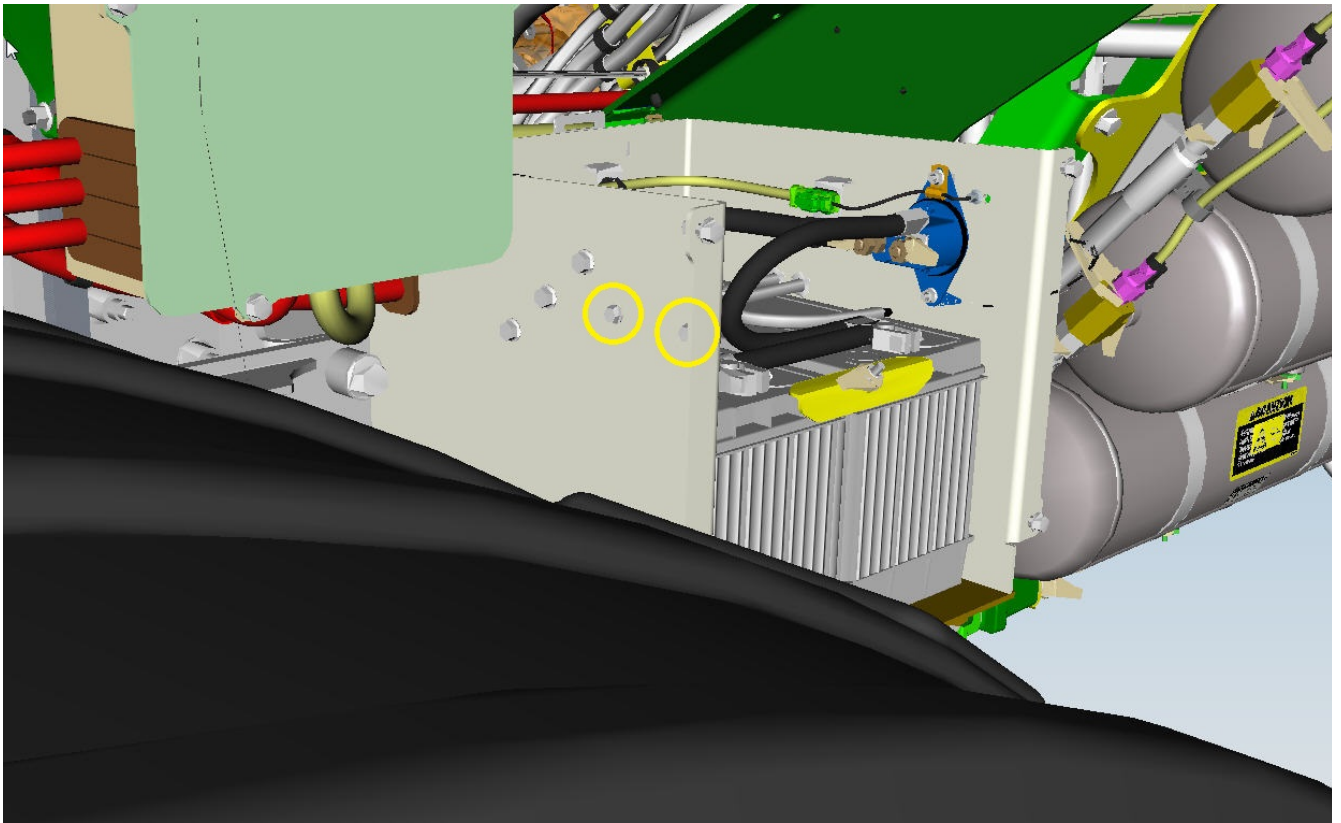

Outer View.

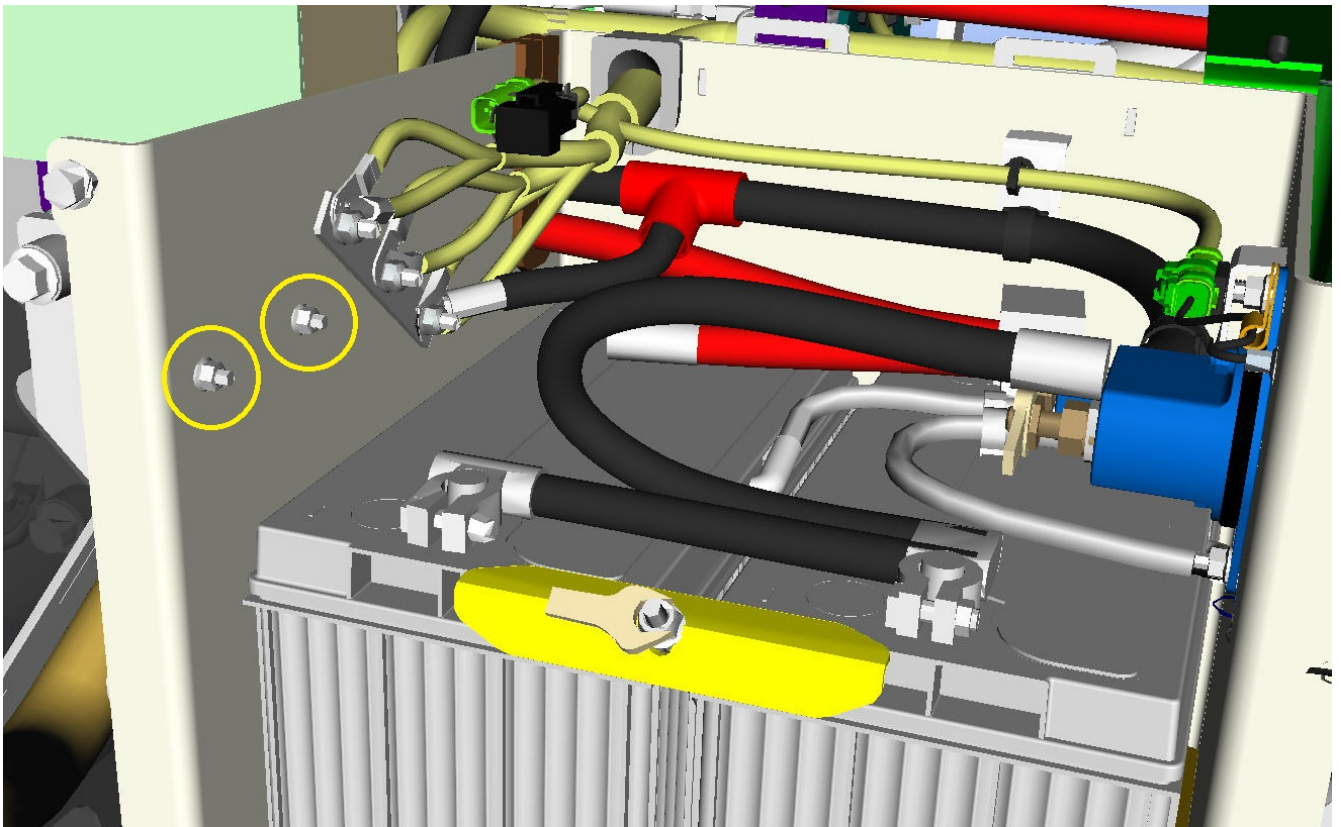

Inside View.

Follow the Install Instructions provided with the tarp. Here are a few links that may help:

Large 4-Series Row Crop Chassis:

Starting with MY19 machines, there is a new Drybox Wiring Harness with a 2-Pin connector for installing the roll tarp.

- [AKK27497 - Drybox Wiring Harness Schematic](#)



• Outside Frame Routing Location



- Inside Frame Routing Location

AGRI-COVER SRT-2® SPOOL ROLL TARP:

- [Installation Manual](#)

- [Install Videos](#)

BOX OPTIONS FOR NEW LEADER L4000G4/ DN495	COLOR	PART NUMBER
MultiApplier (Single Bin and Dual Bin) Opening Dimensions 102" X 168" (14')	Yellow	4000688
MultiApplier (Single Bin and Dual Bin) Opening Dimensions 102" X 168" (14')	Black	4000687
MultiBin (Four Bin) Opening Dimensions 102" X 140" (11' 8")	Yellow	4000686
MultiBin (Four Bin) Opening Dimensions 102" X 140" (11' 8")	Black	4000685

- For additional support, please contact Russ Kiefer (Agri-Cover) at (701) 269-9776.

SHURCO CABLE-LOK™


- [Installation Instructions](#)
- [Owner's Manual](#)
- For additional support, please contact Technical Support (Shur-Co®) at (866) 748-7435

Additional Information :

Note: If you connect both the Positive and the Negative to the battery stud, the tarp will automatically roll open when you hit the Battery Disconnect. Therefore, you will want to install:

Positive: to the battery stud

Negative:

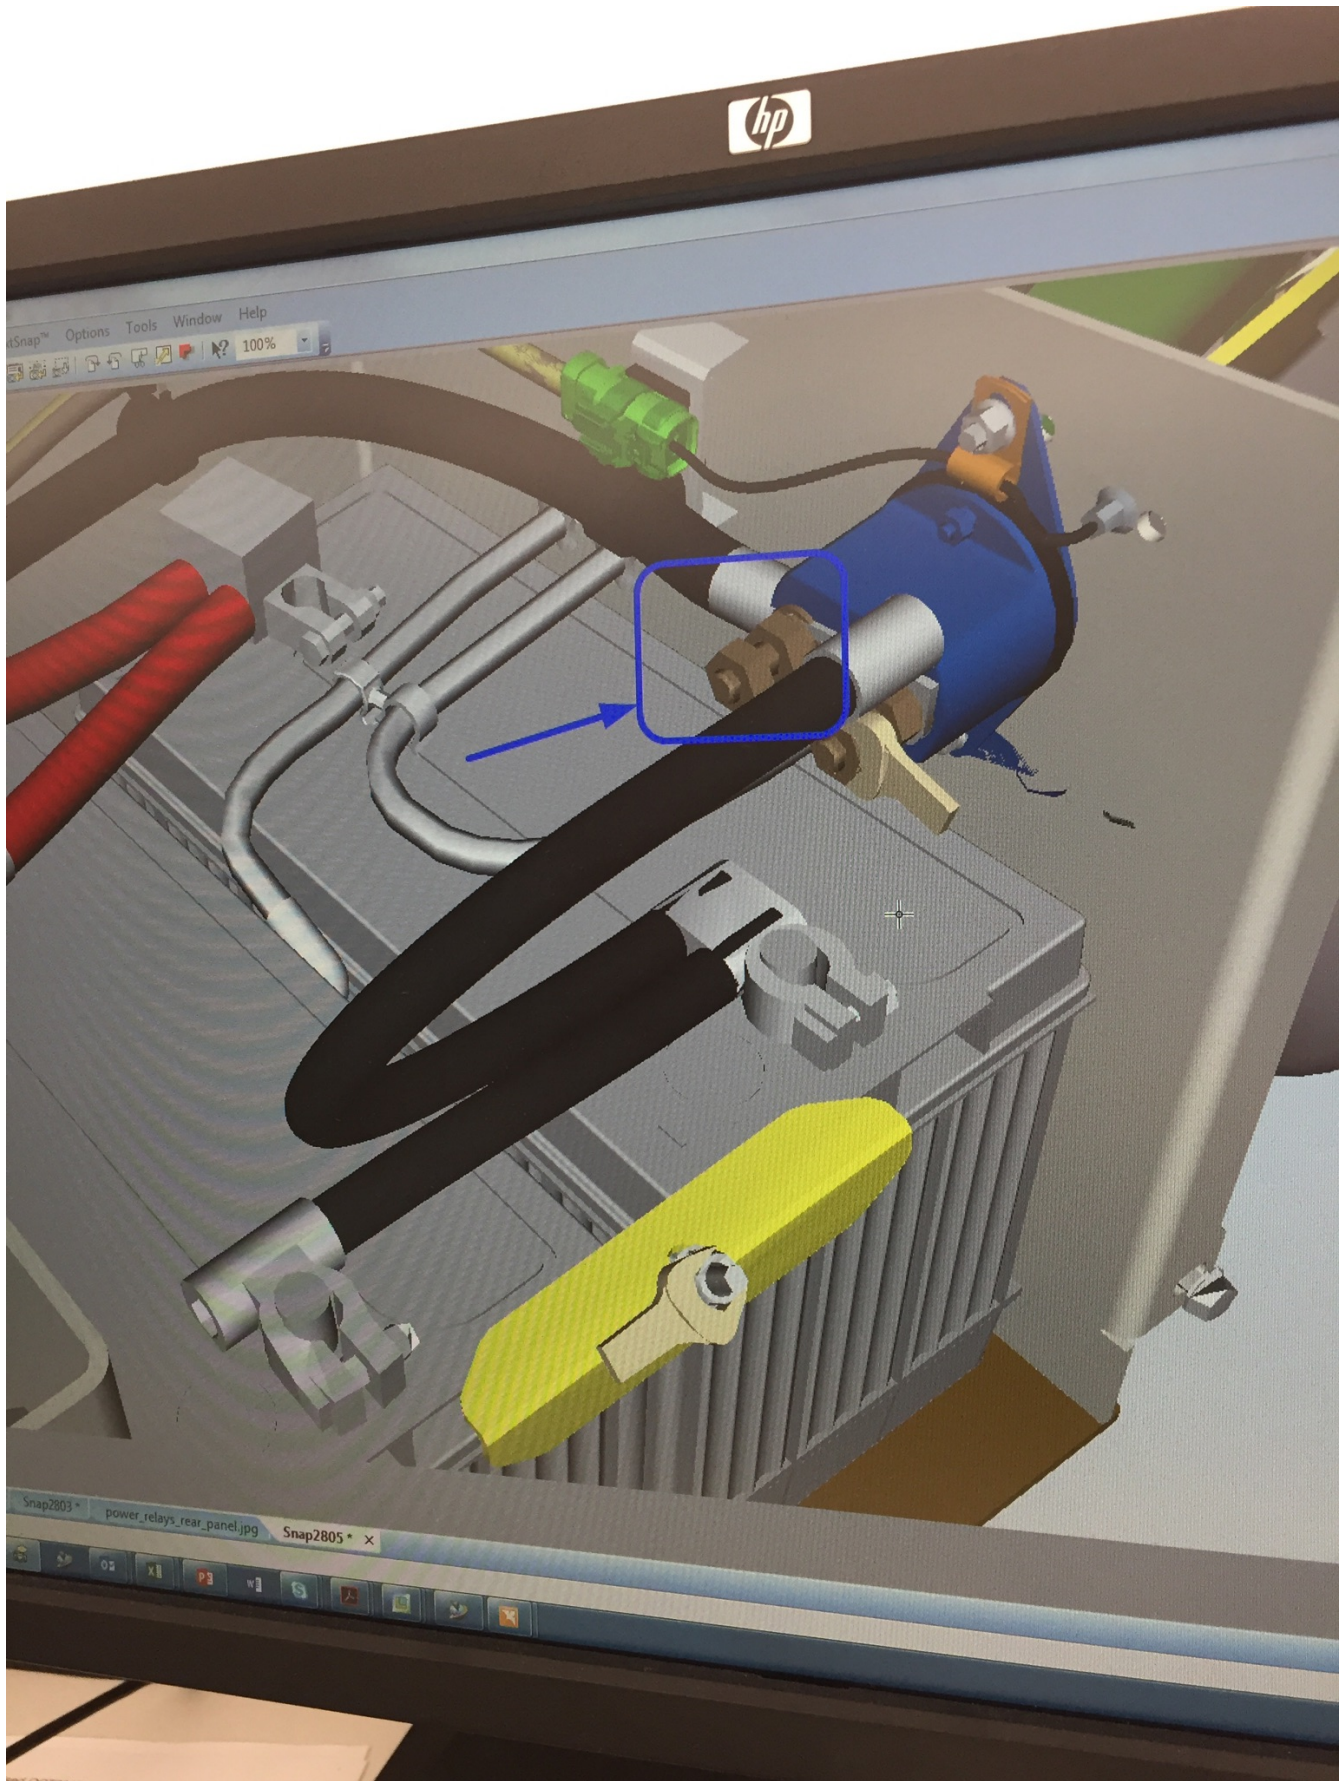

disconnect. to the

R4030, R4038, R4045, F4365 - DN495, F4365 - AB485, R4044, R4060, F4365 - DN495 G5, F4365 - Chassis

install instructions, spreader, SPRA BOX, 7501

