




Limited Edition - Special Instructions


- The Access Limited Edition Roll-Up cover comes with "D" rings to be used as cargo ties. Before clamping the rails to the box, assemble "D"- rings to Access clamps as shown in figure A. When clamp is mounted with rail to box, "D" ring should hang as shown in figure B.

NOTE: MAXIMUM LOAD FOR EACH "D" RING IS 80 lbs. DO NOT EXCEED 80 lbs AT ANY SINGLE POINT, DISTRIBUTE LOAD EVENLY AMONG ALL TIE DOWNS.

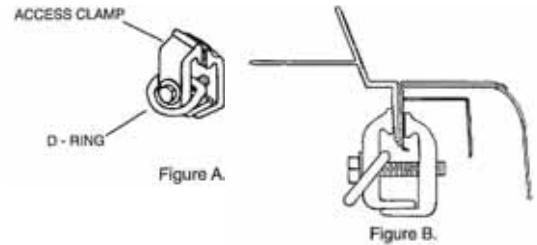

2. ACCESS Limited Edition - AUTOLATCH II™ - TWIST HANDLE LATCH OPERATION

- TO CLOSE:** Release retainer straps at front, using both hands. Unroll cover to tailgate, engage rear bar into strikes, push down on cover bar until latches lock into place under side rails - shown below. Always seal both sides with the hook and loop system.
- TO OPEN:** Open tailgate - reach under rear cover bar and twist release handle about 1/4 turn, at the same time lift up on rear of roll-up bar, open a half roll - using both hands continue rolling to front of box (not against cab). Then secure with storage straps.

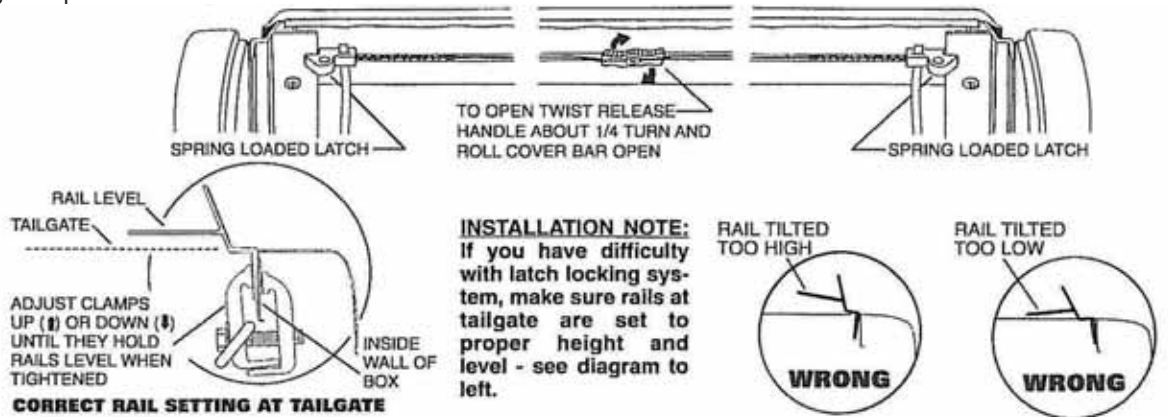

3. TRAILSEAL TAILGATE GASKET KIT #30946

SUPPLIES/TOOLS NEEDED

Mild soapy water and clean rags.	Scissor

IMPORTANT - READ BEFORE INSTALLING: The following instructions are applicable for domestic and import trucks. However, due to the variety of truck box designs, your application may differ from these instructions. Use a 1" test piece to determine the most suitable application for your truck.

INSTRUCTIONS

<p>1) Clean surface with soapy water and dry. Then wipe with alcohol prep pad included in kit. Avoid touching cleaned surface during installation.</p>	<p>2) Cut test piece 1" long and select best location between bed floor and tailgate.</p>	<p>3) Remove test piece and apply seal in a straight line continuous from one side to other side. Begin 1/2" beyond box wall corner and stop 1/2" beyond box wall corner at opposite end.</p>	<p>4) Use same 1" test piece from Step 2 and select best location up side of box wall. Close tailgate, it should compress the rubber seal approx. 1/4 to 3/8 inch. Apply seal from floor to top of box on both sides. Inspect seal location at sides and floor and make adjustments now if needed.</p>	<p>5) Apply ample pressure to entire seal for maximum adhesion. TIP: When done lubricate the bottom of the tailgate with soapy water and close tailgate. Leave closed for several days. This trains the seal to take the shape of the tailgate resulting in better adhesion and sealing.</p>